

Product information

Drummotors

TM 400-50



Van der Graaf
Power Transmission Equipment



The TM
400's
playground





TM 400-50

applications

A wide range of

Van der Graaf has achieved a prominent position on both the domestic and international market with its “GV” drum motors. The “GV” drum motor has found success in a wide range of applications including the following: automotive, X-ray, construction, postal, courier, mining, aggregate, airline baggage, package flow, tyre manufacturing, fish processing, poultry processing, meat processing, agriculture, fruit and vegetable, farming, forestry, baking, dairy and many more.

4	Introduction
5	Benefits
6	Selection table
7	Selection table Dahlander motors
8	Dimensions drum motor mild steel
	Dimensions tail drum mild steel
9	Cable exit
	Dimensions bracket
1	Energy & Cost savings analysis
0	Benefits
1	Options
1	Product range
1	Company profile
2	Contact us



Benefits

What is a drum motor?

The Van der Graaf drum motor is a one component conveyor drive which houses all components internally, eliminating the need for external components like motor, gearbox, sprockets, chain, chain guard and pillow block bearings. This reduces operating and maintenance costs, improves safety conditions, and because it is completely sealed our drum motors can operate in extreme environmental conditions.

The rugged design of the Van der Graaf drum motor provides the end user with a quieter environment, space savings, efficiency and reliability with virtually no maintenance.

Solid, maintenance free design

The electric motor, gears and bearings are placed inside the drum ensuring a compact construction. High performance sealings are used to prevent oil leakage and the ingress of water and dust. Different sealing types have been developed for different situations e.g. ip68 underwater sealing. With a minimum ip rating of ip66, water and dust have no chance of entering the drum motor. The oil in the drum motor is used not only to lubricate the gears but also to keep the electric motor cool. The shell has a barrel crowned finish to aid belt tracking.

Long life span

All gears are made of high alloyed hardened steel. Low noise level and longuevity are ensured by machining the gear teeth to fine tolerances and finishing by grinding or honing. Ball and needle bearings are well-sized. The power is connected directly to the stator (standard insulation class F). There is no need for slip rings or brushes.

Cast iron endflanges

Many manufacturers of drum motors use aluminium parts for gear housings, endflanges and shells. They state the main reason for using aluminium is to save weight in comparison with steel or cast iron. The reason however is due to cost as the softer aluminium is easier to machine. Van der Graaf exclusively uses cast iron for their endflanges, stator housing, motor housing, gear housing and terminal box. Steel is used for the shell. Compare the weights. Can you really compare the strength of aluminium with steel or cast iron? Does it protect sufficiently against possible external 'impact' forces or high belt tension on a conveyor?

Removeable endflanges

Almost all drum motors, especially in the Ø 80 - 320 mm range, are designed with glued or pressed endflanges. This makes the motor cheaper to produce, but makes it hard to service or repair. Removing a glued endflange is only possible with special tools or after applying heat. If the drum motor is lagged, the lagging may get damaged when heating. This all equates to lower initial costs, but higher costs for maintenance. Not with Van der Graaf drum motors. On smaller diameters one, and on larger diameters both endflanges are fitted with bolts. Ask your maintenance engineer what he prefers.

Grounded or honed gear teeth

The quality of the external and internal gears determines how much noise is produced by a drum motor. Milling or hardmilling is not sufficient according to Van der Graaf. Grounding and honing of the gear teeth offer the highest quality. At Van der Graaf both treatments are standard procedure. You can actually predict the life span of a gearbox by the amount of noise produced. Little noise means little friction, thus less wear and increased longuevity.

Selection table

TYPE	Power	Beltspeed m/s at 50					Min. L	Min. L	Full load	Weight
TM	kW	Hz Beltpull N					mm	mm	curr.	kg
400.50							Design	Design	400 V -	L=600
							A	B	50 Hz	
									I = ... A	
215	11,0	4,80	4,2	3,6						
215 Z		2175	249	290						
215 ZV		3,40	0	0	2,60	2,40				
		3075	0	5	4020	4355	600	650	19,7	205
		2,00	3,2	3,0						
		5225	326	348						
410	7,5	4,30	0	0						
410 Z		1655	3,9	3,5	3,10	2,80				
410 ZV		3075	182	203	2300	2545	600	650	15,0	205
		1,70	0	0						
		4190	5	5						
		1,30	1,6	1,5						
		5480	445	475						
475	5,5	4,30	0	0						
475 Z		1215	3,9	3,5	3,1	2,8				
475 ZV		3075	134	149	168	186	600	600	10,5	200
		1,70	0	0	0	0				
		5225	0	5	5	5				
		1,00	1,6	1,5	1,3	1,2				
		5225	326	348	402	435				
455	4,0	4,30	0	0						
455 Z		885	3,9	3,50	3,10	2,80				
455 ZV		2925	975	1085	1225	1355	600	600	7,8	195
		1,30	0							
		3800	345							
		0,70	1,1	0,85	0,80					
		5430	5	4470	4750					
		2,80	0,9	2,10	1,90	1,70				
		1020	2,40	1,90	1,50	1,30	600	600	6,6	195
		0,90	0,80	0,70	0,65	0,60				
		3165	3565	4070	4385					
640	3,0	3,50	1,60	1,40	1,10					
640 Z		0,60	1,780	2035	2590		600	600	7,1	195
640 ZV		0,50								
		0								
630	2,2	1,9	1,6	1,4	1,10	1,00				
630 Z		110	130	149	1900	2090	600	600	4,9	195
630 ZV		0	0	0						
		0,6	0,5	0,4						
		348	418	464						
820	1,5	1,4	1,2	1,1	0,8	0,75				
820 Z		0,4	119	129	178	1900	600	600	4,6	195
		0,2	0	0	0					
		0	0	0						
1220	1,5	0,4	0,4	0,3	0,3					
1220 Z		0,9	0,7	0,6	0,5		600	600	5,8	200
1220 ZV		0,5	0,35	0,3	0,2					
		0,3								
		475								
815	1,1	1,4	1,2	1,1	0,8	0,75				
815 Z		0,4	870	950	130	1395	600	600	3,3	195
		0,2	0	0	0					
		0,3	261	290	5					
1215	1,1	0,4	0,4	0,3	0,3					
1215 Z		0,9	0,7	0,6	0,5		600	600	5,9	195
1215 ZV		0,5	0,35	0,3	0,2					
		0,3								
		348	402							
		0								
		0,2								
		0								

Available standard facewidth's: 600 - 650 - 700 - 750 - 800 - 850 - 900 - 950 - 1000 - 1050 - 1100 - 1150 mm
When an electro-mechanical brake is fitted, the minimum facewidth is increased by 150 mm
When a backstop is fitted in a 2-pole drum motor, the minimum facewidth is increased by 50 mm
The total weight of a drum motor grows approx. 12,5 kg. per 100 mm
Available torque: (Beltpull N x drum diameter m) / 2 Nm



Selection table Dahlander motors

TYPE TM 400.50	Power kW	Beltspeed m/s at 50 Hz Beltpull N							Min. L mm Design A	Min. L mm Design B	Full load curr. 400 V - 50 Hz I = ... A	Weight kg L=600
470/210 470/210 Z	5,0/7,5	2,40/4,80 1980/1485 1,70/3,40 2795/2095	2,10/4,2 0 2260/1695 1,60/3,2 0	1,80/3,6 0 2640/1980 1,50/3,0 0	1,30/2,60 3655/2740	1,20/2,40 3960/2970	1,00/2,00 4750/3565		650	700	10,6/15,2	205
455/275 455/275 Z 455/275 ZV	4,0/5,5	2,40/4,80 1585/1090 1,00/2,00 3800/2615 0,70/1,40 5430/3730	2,10/4,2 1810/124 5 2,10/4,2 5 4220/290	1,90/3,8 2000/137 5 1,90/3,8 5 4470/307	1,70/3,40 2235/153 5 0,80/1,60 5 4750/326	1,50/3,00 2535/1740	1,30/2,60 2925/2010	1,10/2,20 3455/2375	600	650	7,8/10,9	200
440/255 440/255 Z	3,0/4,0	2,40/4,80 1190/790 0,90/1,80 3165/2110	0,90/1,8 3355/905 0,85/1,70 3355/2235	0,85/1,7 5000/1000 0,80/1,60 3565/2375	1,70/3,40 1675/1120 0,70/1,40 4070/2715	1,50/3,00 1900/1265	1,30/2,60 2190/1460	1,10/2,20 2590/1725	600	600	5,8/7,1	195
830/440 830/440 ZV	2,2/3,0	1,40/2,80 1495/1020 0,43/0,86 4920/3355 0,40/0,80 5225/3565	1,20/2,40 1740/1190	1,05/2,10 1990/1355	0,95/1,90 2200/1500	0,85/1,70 2460/1675	0,75/1,50 2785/1900	0,50/1,00 4180/2850	600	600	7,7/5,9	200
820/430 820/430 Z	1,5/2,2	2,15/4,30 665/485 0,85/1,70 1675/1230 0,45/0,90 3165/2320	1,95/3,90 730/535 0,75/1,50 1900/1395 0,43/0,85 3355/2460	1,75/3,50 815/595 0,65/1,30 2190/1610 0,40/0,80 3565/2615	1,55/3,10 920/675 0,55/1,10 2590/1900 0,35/0,70 4070/2985	1,40/2,80 1020/745 0,50/1,00 2850/2090 0,33/0,65 4385/3215	1,20/2,40 1190/870	1,05/2,10 1355/995	600	600	5,8/4,7	195
810/230 810/230 Z	0,75/2,2	1,40/2,80 1495/1020 0,43/0,86 0 0,40/0,80 4920/3355	1,20/2,40 1740/1190	1,05/2,10 1990/1355	0,95/1,90 2200/1500	0,85/1,70 2460/1675	0,75/1,50 2785/1900	0,50/1,00 4180/2850	600	600	3,0/4,6	195

5

Available standard facewidths: 600 - 650 - 700 - 750 - 800 - 850 - 900 - 950 - 1000 - 1050 - 1100 - 1150

mm When an electro-mechanical brake is fitted, the minimum facewidth is increased by 150 mm


When a backstop is fitted in a 2-pole drum motor, the minimum facewidth is increased by 50 mm The total weight of a drum motor grows approx. 12,5 kg. per 100 mm

Available torque: (Beltpull N x drum diameter m) / 2 Nm

Dimensions


TM 400A50

TM 40A50, mildsteel drum motor with cast iron junction box

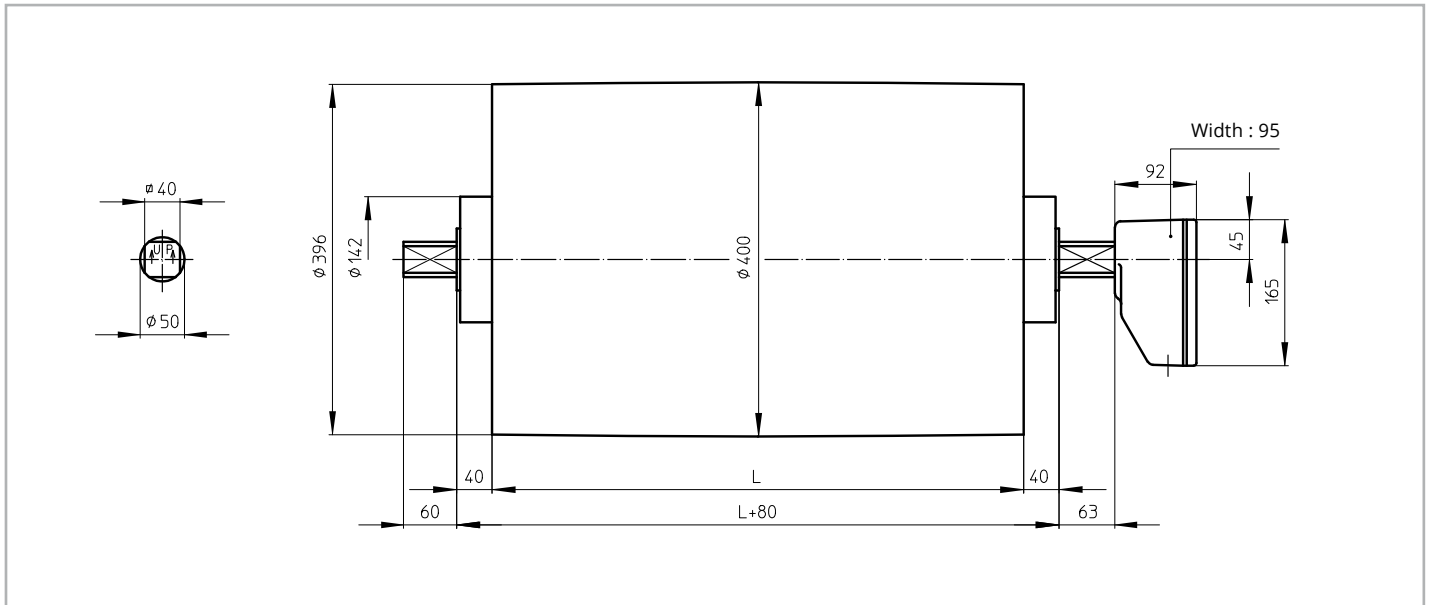

KT 400A50

KT 400A50, mildsteel tail drum

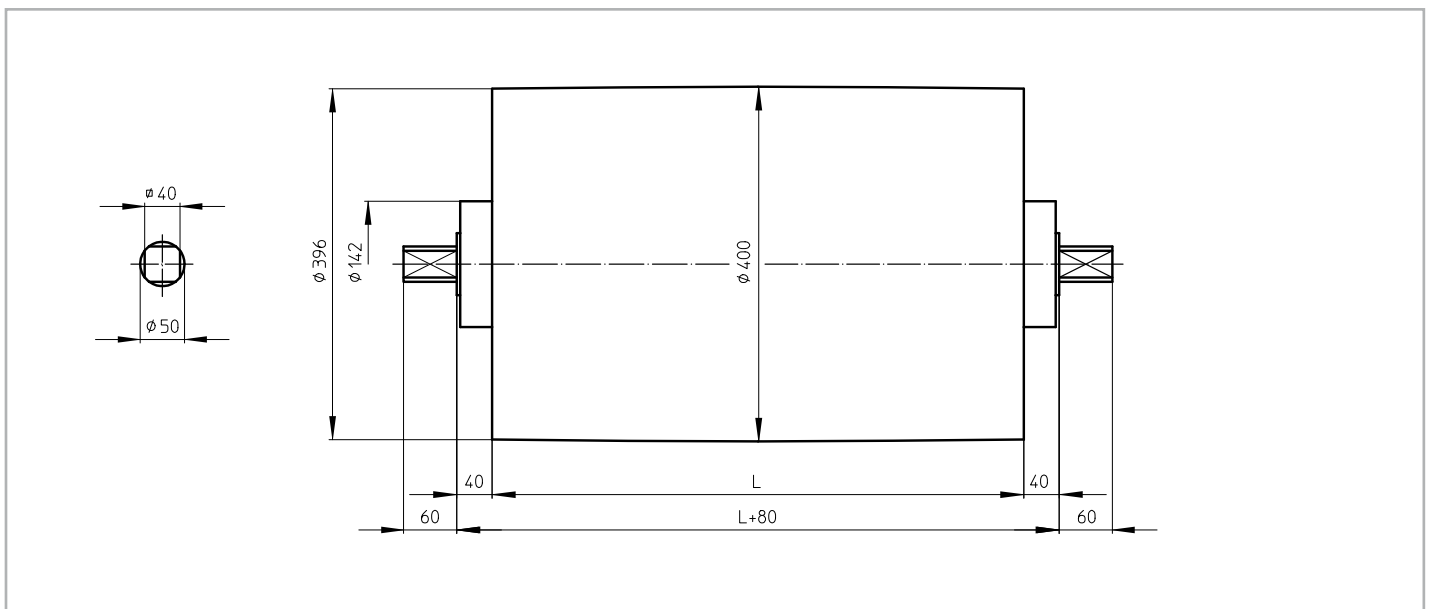



Cable exit


Standard design of a TM 400-50 is with a cast iron terminal box. For stainless steel design, this can be either a PU coated cast iron or stainless steel terminal box.

On request a drum motor can be fitted with a cable. In this case it is important to know the available voltage (preferably 1 voltage), the length of the cable, whether the cable is shielded or not and the type of cable exit.

An overview of available cable exits is shown below.


Option 1

Straight cable exit with cable gland

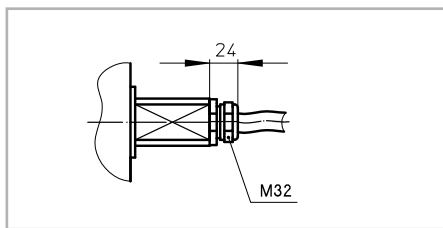


Option 3

Elbow cable exit with cable gland
(minimum facewidth increases with 50 mm)

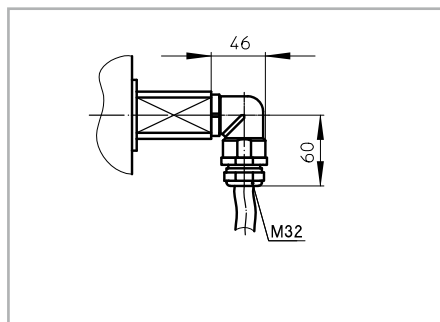

AB 50

AB 50, cast iron or stainless steel
bracket Weight: 7,2 kg per pair

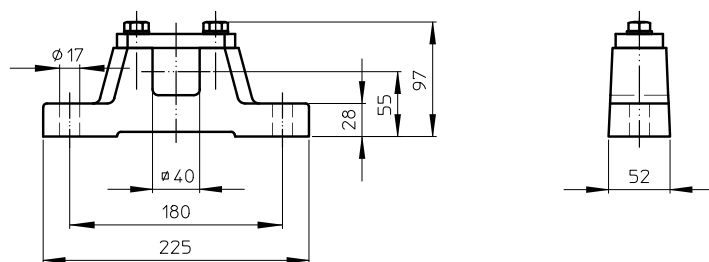

Scope

This is a comparative analysis concerning the energy consumption of a conventional conveyor with an electric motor, a gear reducer and a chain drive, and a conveyor driven by a Van der Graaf drum motor.

Hypothesis

There will be considered that both conveyors, the conventional conveyor and the conveyor driven by Van der Graaf drum motor:

- have the same rated output power
- operate in the same environmental conditions (temperature, pressure, humidity, altitude)
- supplied power have the same parameters (phase number, line voltage, frequency)
- loaded at the same constant output power, equal by the rated output power, for the whole period of the considered operation time.

Calculation

- The conventional conveyor (index C from conventional) operates with a Baldor motor VM3615T, with rated output power 5 hp (or 3730 W, rated speed 1750 rpm, rated voltage 3 x 460 V, rated frequency 60 Hz), a coupling, a right angle gear reducer with a gear ratio 20, and a chain drive with ratio 1.5. The electric motor has the rated efficiency 85,5%, the coupling has the efficiency 99%, the gear reducer is a worm gear reducer with efficiency of 87% and the chain drive has the efficiency 75%.
(See Diagram A)

The total efficiency of the conventional conveyor:

$$C = 0,855 \times 0,99 \times 0,87 \times 0,75 = 0,552, \text{ or } 55,2\%$$

The input power (index 1 for input and 2 for output) of the conventional conveyor is:

$$P_1 C = P_2 C / \eta_C = 3730 / 0,552 = 6757,25 \text{ W} \approx 6,757 \text{ kW}$$

- The conveyor (index M from drum motor) driven by a Van der Graaf drum motor is considered. It has the same rated output power as the conventional conveyor, 5 hp or 3730 W and contains an electric motor with rated efficiency 87% and a parallel-shaft gear reducer with efficiency 96%.
(See Diagram B)

The total efficiency of the conveyor driven by Van der Graaf drum motor is:

$$M = 0,87 \times 0,96 = 0,835, \text{ or } 83,5\%$$

The input power (index 1 for input and 2 for output) of the conveyor driven by Van der Graaf drum motor is:

$$P_1 M = P_2 M / \eta_M = 3730 / 0,835 = 4467 \text{ W} = 4,467 \text{ kW}$$

- An operation time of both conveyors is determined taking into consideration that both conveyors work 8 hours shift, 2 shifts per day, 5 days per week, and 52 weeks per year,

$$t = 8 \text{ hours/shift} \times 2 \text{ shift/day} \times 5 \text{ days/week} \times 52 \text{ weeks/year} = 4160 \text{ hours/year}$$

- The electric energy consumed by the conventional conveyor, in the considered operation time, is determined by the product of the input active power and the operation time:

$$C \text{ } E_{P1C} \times t = 6,757 \text{ kW} \times 4160 \text{ hours/year} = 28109,12 \text{ kWh/year} \approx 28109 \text{ kWh/year}$$

- The electric energy consumed by the conveyor driven by Van der Graaf drum motor, in the considered operation time, is similarly determined:

$$M \text{ } E_{P1M} \times t = 4,467 \text{ kW} \times 4160 \text{ hours/year} = 18583 \text{ kWh/year}$$

- An average price of the electric energy in the Netherlands is considered:

$$p = 0,08 \text{ €/kWh}$$

- The cost of the electric energy per year of the conventional conveyor will be calculated as the product between the consumed electric energy in the considered operation time and the specific price of the electric energy:

$$C \text{ } E_C \times p = 28109 \text{ kWh/year} \times 0,08 \text{ €/kWh} = 2248,72 \text{ €/year} \approx 2249 \text{ €/year}$$

- The cost of the electric energy per year of the conveyor driven by Van der Graaf drum motor will be similarly calculated:

$$M \text{ } E_M \times p = 18583 \text{ kWh/year} \times 0,08 \text{ €/kWh} = 1486,64 \text{ €/year} \approx 1487 \text{ €/year}$$

- The energy saving per year of the higher efficient conveyor, respectively of the conveyor driven by Van der Graaf drum motor, is determined as a difference between the consumed energy of the conventional conveyor and the consumed energy of the conveyor driven by Van der Graaf drum motor, in the considered operation time of one year period.

$$S \text{ } E_{EC} - E_M = 28109 \text{ kWh/year} - 18583 \text{ kWh/year} = 9562 \text{ kWh/year}$$

- The cost saving per year of the higher efficient conveyor, respectively of the conveyor with Van der Graaf drum motor, is determined as a difference between the cost of the consumed energy of the conventional conveyor and the cost of the consumed energy of the conveyor driven by Van der Graaf drum motor, in the considered operation time of one year period.

$$S \text{ } C_{CC} - C_M = 2249 \text{ €/year} - 1487 \text{ €/year} = 762 \text{ €/year}$$

Energy cost savings with conveyor driven by Van der Graaf drum motor is 762 €/year

NOTE: If the cost of energy of the conventional conveyor is considered 100%, then the cost of energy of the conveyor driven by Van der Graaf drum motor is 66% and the cost savings with the Van der Graaf drum motor is 34%.

Diagram A:

Conveyor driven by a conventional conveyor drive


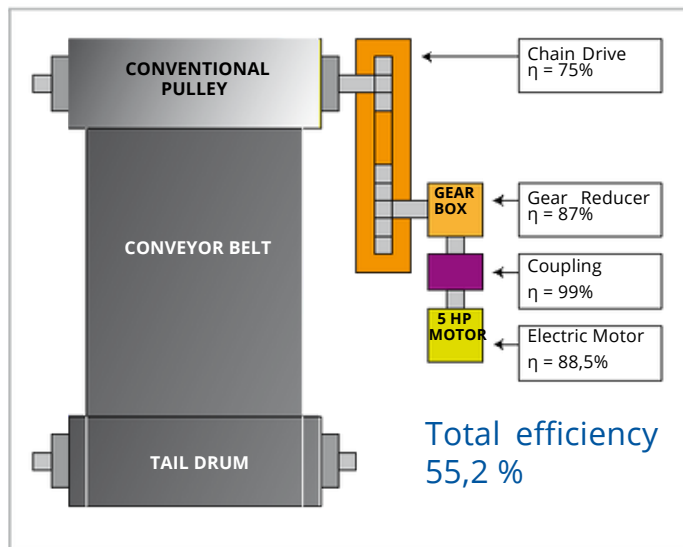



Diagram B:

Conveyor driven by a Van der Graaf drum motor

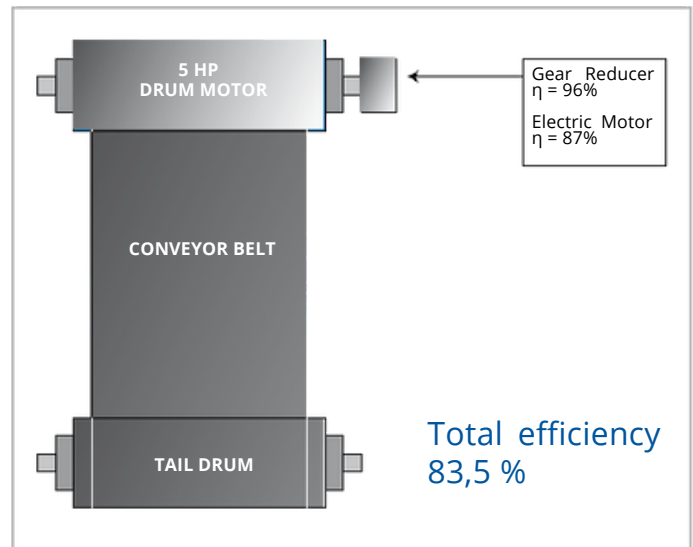


Graph 1:

Energy consumption comparison

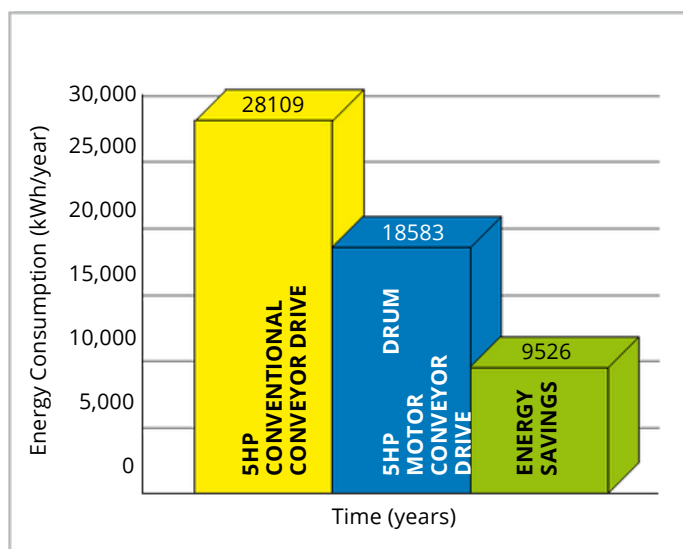

Graph 2:

Energy cost comparison (@ 0.08 €/kWh)

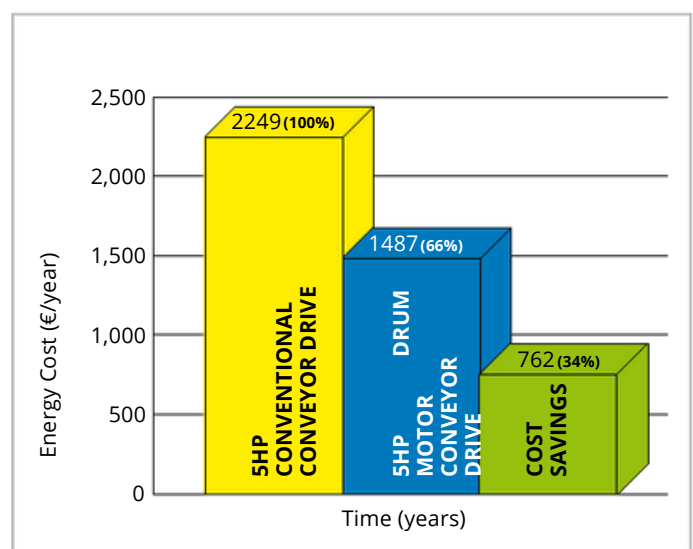

Material

The external parts of the drum motor are made from mild steel and cast iron. Depending on the application it is also possible to manufacture in stainless steel (complete or part). You can choose between RVS 304 (general food industry) and RVS 316 (salt water applications).

Backstop - Brake

If an inclined belt conveyor is stopped fully loaded, it could run backwards.

To prevent this we can install a backstop. One of the bearings in the drum motor is replaced by a one way bearing. The way this bearing is installed determines the direction of rotation of the drum. TBRH indicates a cw rotation and TBLH ccw.

In situations where a drum motor needs to be able to drive in both directions it is not possible to use a backstop. In this case we use a brake. When an declined belt or a horizontal belt needs to be stopped quickly to pick or place items a brake is the best solution.

Inclined position

Sometimes a drum motor needs to be installed on an inclined or even vertical position. This is possible, but we need to make adjustments to the oil level in the drum as the oil will flow to the lower side of the drum motor causing the top bearing to run without lubrication. To prevent problems we will need to know the installation angle so we can fill the drum with extra oil and fit a double sealed bearing on the high side.

Thermal protection

A Van der Graaf drum motor can be fitted with thermal protection. This consists of either a thermistor (PTC) or bi-metal (klixon). We install these on each phase of the electric motor.

Encoder - Sensor bearing

In certain applications it is required to measure the speed or position of a conveyor belt. For this type of application we can install an encoder or sensor bearing to accurately measure rotational speed of the drum motor.

The accuracy needed will determine the type of encoder or sensor used.

Lagging

The power produced by the drum motor has to be transferred to the belt and lagging is used to give more friction between the drum motor and the conveyor belt. Van der Graaf can fit your drum motor with different kinds of lagging.

There is a difference between cold and hot vulcanised lagging. Cold vulcanised means the lagging is glued to the drum motor usually in sheet form and the join 'welded' together. Hot vulcanising is a process where the shell is wrapped around with thin layers of rubber. The shell with the rubber is then baked in an autoclave fusing the layers together creating a seamless finish.

It is possible to cut grooves (e.g chevron or diamond) in the lagging.

Sprockets

Do you wish to use a drum motor to drive modular belts? Van der Graaf can help you! Fitting sprockets suitable for various types of modular belts is a simple solution. The drum motor is manufactured with a cylindrical shell and machined with a patented 'keying' system. The sprockets are simply 'slid' on and locked securely into position.

Sealings for mild steel drum motors

RB sealing - IP 66



This is Van der Graaf's standard sealing. This type of sealing will work in most conditions.

RBS sealing - IP 66



This sealing is specifically designed for those applications where high water pressure is used for cleaning.

HD sealing - IP 66



This sealing is designed for abrasive applications, like sand, gravel and soil.

Sealings for stainless steel drum motors

CR sealing - IP 66



This is our standard sealing for stainless steel drum motors, a very effective, multi labyrinth sealing.

UW sealing - IP 68



This sealing is suitable for under water applications. The maximum depth is approx 2,5 m.

Options

Specification	Standard	Optional
Construction		
Shafts and bolts	Mild	Stainless steel
Endflanges	steel	Stainless steel
Shell	Cast iron	Stainless steel
Junction box	Mild	PU coated cast iron or stainless steel
Cable	steel	Shielded or non-shielded
Sealing mild steel	Cast iron	RBS, HD
Sealing stainless steel	RB	UW
	CR	
Shell		
Crowned	•	
Cylindrical		•
Balanced		•
Lagging, cold vulcanised		•
Lagging, hot vulcanised		•
Lagging, FDA approved		•
Fitted with grooves, patterns		•
Sprockets		•
Electro motor		
Three-phase asynchronous		
Power supply (P < 3 kW)	•	
Power supply (P ≥ 3 kW)	230/400 V - 50 Hz	Other voltages and frequencies on request
	400/690 V - 50 Hz	Other voltages and frequencies on request
Two speed (Dahlander)		•
Insulation class	F	H
Thermal protection		Bi-metal or thermistor
Run by frequency inverter	•	
Other options		
Food grade oil		•
Backstop, mechanical		•
Brake, electro mechanical		•
Clutch brake, electro mechanical		•
Inclined or vertical position		•
Other facewidth's		•
Different shaft designs		•
Encoder or sensor bearing in drum motor		•
Encoder or sensor bearing in tail drum		•
Certificates		
CE		
UL	•	
CSA		•
ATEX zone 22, dust		•
		•




Product range

Our products, an overview

Drum motor type	TM	TM	TM 127.25	TM 138.25	TM 160.25	TM 160.30	TM 215.30	TM 215.40	TM 215B50
Drum diameter (mm)	100B25	113B25	127	138	160	160	215	215	215
Shaft diameter (mm)	100	113	25	25	25	30	30	40	50
Power (kW)	25	25	0.10-1.1	0.10-1.1	0.10-0.75	0.10-2.2	0.10-2.2	0.37-5.5	1.5-4.0
Speed (m/s)	0.05-0.37 0.007-3.60	0.04-0.55 0.008-4.40	0.008-2.60	0.009-2.80	0.13-3.30	0.06-4.00	0.08-5.30	0.12-4.70	0.18-0.31

Drum motor type	TM 273.40	TM 315.40	TM 315.50	TM 400.50	TM 400.60	TM 500.60	TM 500A75	TM 620A75
Drum diameter (mm)	273	315	315	400	400	500	500	620
Shaft diameter (mm)	40	40	50	50	60	60	75	75
Power (kW)	0.37-5.5	0.37-5.5	1.1-11	1.1-11	1.5-22	1.5-22	11-30	11-30
Speed (m/s)	0.16-4.95	0.18-5.20	0.16-4.40	0.20-4.80	0.20-4.60	0.25-4.70	0.80-3.20	1.00-3.90

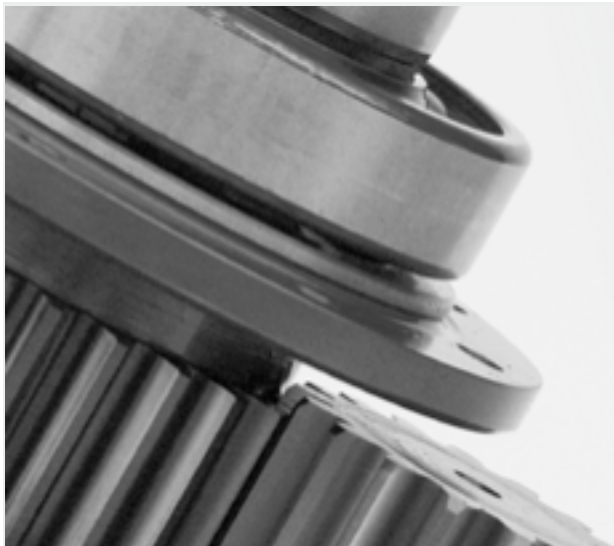

Design benefits

- Robust, industrial design
- Fully enclosed
- Oil filled
- Well-sized gears and bearings

Installation advantages

- Easy to install
- Compact and reliable
- Easy to clean
- Virtually maintenance free
- Low Life Cycle Costs



Notes

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin, light blue horizontal and vertical lines. There are no margins, text, or other markings on the page.

Notes

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin, light blue lines. There are no margins, text, or other markings on the page.



A family company

Van der Graaf, known internationally for its reliability and quality, is a family organization with its head office in Vollenhove, Netherlands.

Top quality and professional service have allowed Van der Graaf to maintain their world leading position in the power transmission industry. With product applications worldwide, Van der Graaf still maintains its down to earth principle:

Not just a superior product, but also superior service!



Van der Graaf

Power Transmission Equipment

Contact us

Netherlands

Van der Graaf B.V.
De Weijert 14
P.O. Box 3
8325 ZG Vollenhove
Tel: 0 0 31 527 241441
Fax: 00 31 527 241488
E-mail: info@vandergraafpte.nl
www.vandergraafpte.nl

Canada

Van der Graaf Inc.
2 Van der Graaf Court
Brampton
Ontario L6T 5R6
Tel: 0 0 1 905 793 8100
Fax: 00 1 905 793 8129
E-mail: info@vandergraaf.com
www.vandergraaf.com

Great Britain

Van der Graaf U.K. Ltd.
Unit 23, The Metro Centre
Welbeck Way Woodston
Peterborough PE2 7UH
Tel: 0 0 44 1733 391777
Fax: 00 44 1733 391044
E-mail: sales@vandergraaf.co.uk
www.drummotor.com

USA

Van der Graaf Corp.
1481 Trae Lane
Lithia Springs GA
30122 Atlanta
Tel: 0 0 1 770 819 6573
00 1 770 819 6566 Fax: 00 1
770 819 6675

Germany

Van der Graaf GmbH
Rheiner Straße 24 B
48432 Rheine-Mesum
Tel: 0 0 49 5975 306210
Fax: 00 49 5975 3062120
E-mail: info@vandergraaf.de
www.vandergraaf.de

Sweden

Van der Graaf Scandinavia AB
Spinngatan 2
260 50 Billesholm
Tel: 0 0 46 42 22 0802 Fax: 00
46 42 22 0803 E-mail:
info@vandergraaf.se
www.vandergraaf.se



Via 4 Novembre 12/4, 40033, Casalecchio di Reno (BO) ITALIA
Tel: +39.051.592.349 Fax: +39.051.592.352 Email: info@roi-srl.it
www.roi-srl.it

www.vandergraafpte.nl